


TinyGateway WiFi Wirepas Wirepas Mesh 2.4GHz gateway

Data sheet



Key features

- Low-power and low-cost Wirepas gateway
- WiFi connectivity based on ESP32 SoC (IEEE 802.11 b/g/n)
- Wirepas Sink based on Nordic nRF52832
- Compliant with Wirepas remote MQTT(S) APIs
- Compact light-weight plastic enclosure
- Dual power-supply: USB-C or internal connector

Key features

Low-power Wirepas gateway with WiFi connectivity with full support of Wirepas gateway drivers for MQTT connection

Supported Wirepas stack: 5.x (up to 5.3)

Operating modes: Wirepas Sink device


Network interface: Wireless LAN

Compatible with MeshCube, Wirepas NMS or with custom back-end, cloud or on-premises

Fully compliant with Wirepas remote MQTT(S) APIs

Web UI manager dashboard and HTTP APIs for configuration and management

TinyGateway WiFi Wirepas: architecture and interfaces

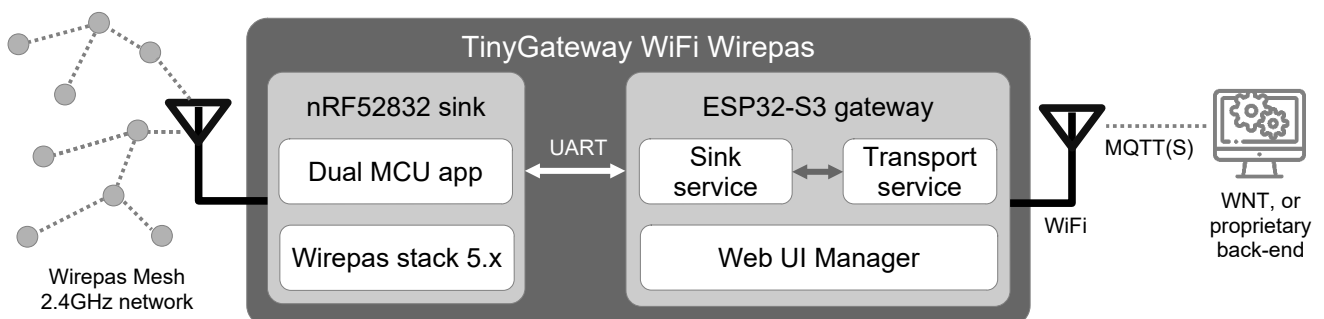



Device specifications	
Hardware specifications	
Platform	Espressif Systems ESP32S3WROOM-1
Processor	ESP32-S3 series, Xtensa® dual-core 32-bit LX7 microprocessor, up to 240MHz
Memory	384 KB ROM, 512 KB SRAM, Up to 8 MB PSRAM
Connectivity	WiFi (802.11), Wirepas Mesh 2.4GHz (v5.x)
User interfaces	Power-on LED, Wirepas LED, WiFi RGB LED, factory-reset button
WiFi specifications	
Core module	Espressif Systems ESP32-S3
Protocol	IEEE 802.11 b/g/n
Frequency band	2.412 to 2.484 GHz
Channel spacing	20 MHz (802.11 b/g/n), 40MHz (802.11n)
Sensitivity	-98 dBm (802.11b, 1 Mbps)
TX Power	20.5dBm (max., 802.11b, 1 Mbps)
Antenna type	Meander Planar Inverted F-antenna
Antenna gain	0dBi
Wirepas Mesh specifications	
Core module	Nordic Semiconductor nRF52832 SoC, 32-bit ARM Cortex-M4
Protocol	Wirepas Mesh 2.4GHz, v5.x (up to 5.3)
Frequency band	2.402 to 2.480 GHz
Channel spacing	2 MHz
Sensitivity	-96 dBm
TX power	4dBm (max.)
Antenna type	Planar Inverted F-antenna
Antenna gain	2dBi
Power supply	
Power voltage	• 5 Vdc (USB) • 4.5 to 30 Vdc (internal 2-port)
Power connector	• USB: USB-C connector • Internal 2-port: pluggable connector, Würth series 301/3157 compatible Rear knockout for cable entry (20mm diameter)
Current	300 mA @5Vdc (max., with 802.11b, 1 Mbps, @20.5 dBm)
Mechanical specifications	
Material	Recyclable ABS plastic (flame-resistant UL94V-0)
Color	White
Size	74 x 74 x 25.5 mm
Weight	50 gr
Protection	IP40



BlueUp S.r.l.
Loc. Belvedere, Ingresso 2, 99, 53034 Colle di Val d'Elsa (SI), ITALY
Tel. +39 344 2030929, Fax +39 0577 043101
E-mail: info@blueupbeacons.com, Web: www.blueupbeacons.com
P.IVA/CF/N. iscr. CCIAA (SI). 01373980521, VAT: IT01373980521

Mechanical specifications (cont.)	
Assembly	Front and back clip together construction (tool required for disassembly once mounted)
Mounting options	Dual-adhesive or screws
Environmental specifications	
Operating temperature	-20°C to +65°C
Storage temperature	-40°C to +85°C
Certifications	
CE (RED), FCC	

BlueUp reserves the right to change product specifications at any time without prior notice.
Wirepas, Espressif Systems, Xtensa, Nordic Semiconductor are trademarks of respective owners